


**Hot Rolled Thread Bar Φ15mm Right Hand Thread**

**热轧 Φ15/17mm 右旋**



| dia [mm] | dh [mm]  | dv [mm]  | h [mm] | b [mm] | c [mm] | r   | α     |
|----------|----------|----------|--------|--------|--------|-----|-------|
| 15       | 14.7±0.2 | 14.4±0.5 | 1      | 4.2    | 10     | 0.5 | 78.5° |

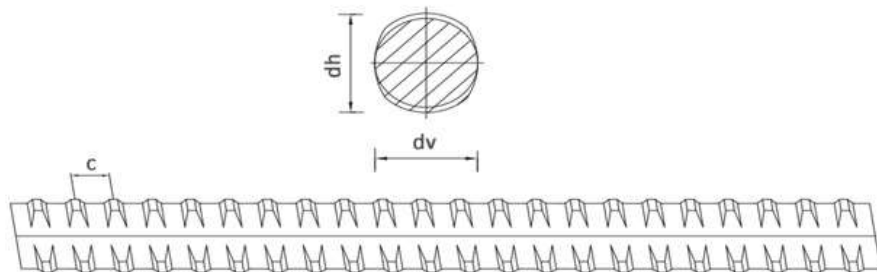

| Grade/Property     | 950/1050 [Mpa] |
|--------------------|----------------|
| Yield/Tensile [KN] | 168/186        |
| Elongation [A%]    | 7              |
| Weight [KG/M]      | 1.4            |
| A [mm2]            | 177            |

**Applications**

- Tie Rod
- Formwork
- Scaffolding
- Hook anchor

**Surface Treatment**

- \*Zinc Plated
- \*Hot Dipped Galvanized
- \*Epoxy coating
- \*H.D.G+Epoxy coating